


ISOFRAX® 1400 ANCHOR-LOC® MODULES

Description

Isofrax® 1400 Modules combine the performance features of the proven Anchor-Loc® Module attachment systems with the new Isofrax® 1400 Thermal Insulation.

Isofrax 1400 Thermal Insulation is the latest generation of proven revolutionary low bio-persistent fibre technology. Isofrax® 1400 Blanket is manufactured using enhanced fiberization techniques combined with new proprietary processing technology, offering both a 1400 grade classification and an increased use limit temperature for applications up to 1300°C. The needled blanket is completely inorganic and retains its strength, flexibility and thermal properties in many working environments, without the generation of smoke or fumes.

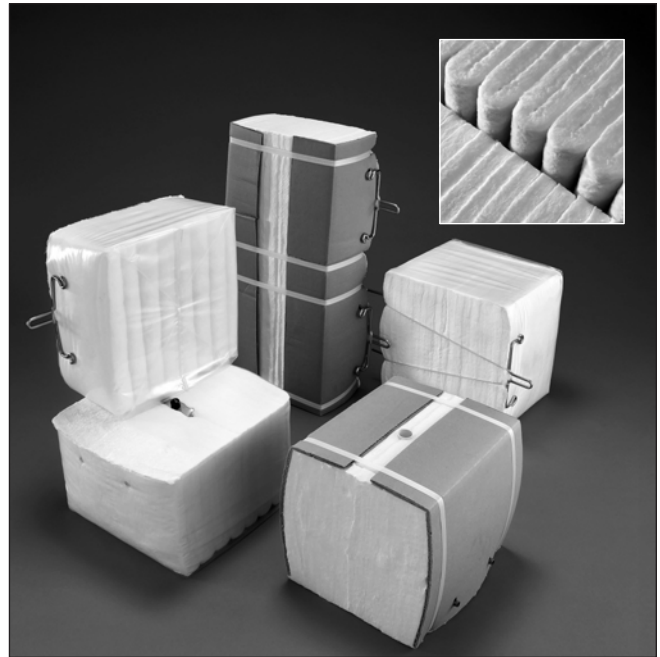

Available in a range of density and thickness combinations, **Isofrax 1400 Blanket** can be used in a wide variety of high-temperature applications.

Isofrax 1400 Blanket has excellent chemical stability and is unaffected by most chemicals except hydrofluoric and phosphoric acids and concentrated alkalis. If wet by water or steam, thermal and physical properties remain unaffected after drying.

Isofrax 1400 Anchor-Loc Modules are typically manufactured from folded Isofrax 1400 Blanket. The fold orientation may be on the hot face or cold face, subject to customer preference. These modules can be produced with various anchoring systems to enable quick, easy and efficient installation for most lining applications.

General Characteristics

Isofrax 1400 Module products have the following outstanding characteristics:

- High-temperature stability
- Low thermal conductivity
- Resistance to thermal shock
- Lightweight
- Low heat storage
- Fast installation & selection of attachment systems

ISOFRAX® 1400 ANCHOR-LOC® MODULES

Typical Applications

- Heat treatment and forge furnaces
- Ceramic tunnel kilns and intermittent kilns
- Annealing furnaces
- Door and cover linings
- Stress relieving furnaces
- Carbottom heat treating furnaces
- Ladle preheat stands
- Stack, flue and duct linings
- Process heaters
- Incinerators and boilers

Typical Product Parameters

Typical Chemical Analysis (wt. %)	Isofrax 1400 Anchor-Loc Modules
SiO ₂	70 – 80
MgO	18 – 27
Trace	0 – 4

Physical Properties

Colour	White
Product Density	170 & 190 kg/m ³ (10 & 12 pcf)
Classification Temperature	1400°C (2550°F)
Use Limit*	1300°C (2370°F)
Melting Point	1520°C (2760°F)
Mean Fibre Diameter (microns)	4.5

Density	170 kg/m ³ (10 pcf)	190 kg/m ³ (12 pcf)
Thermal Conductivity	W/mK (Btu in/hr ft ² °F)	
Mean Temp.		
400°C 752°F	0.13 (0.87)	0.12 (0.83)
600°C 1112°F	0.20 (1.35)	0.17 (1.18)
800°C 1472°F	0.28 (1.91)	0.24 (1.69)
1000°C 1832°F	0.38 (2.64)	0.34 (2.36)
1200°C 2192°F	0.51 (3.54)	0.44 (3.05)

*The maximum continuous use limit temperature for these products depends upon operating and application conditions, and also the engineered design of the insulation lining. For additional information and support regarding product performance or to identify the recommended product for your application, please contact your nearest Insulcon Application Engineering office. Data are average results of tests conducted under standard procedures and are subject to variation. Results should not be used for specification purposes.

ISOFRAX® 1400 ANCHOR-LOC® MODULES

Availability

	Module Dimensions (mm)	
Length	Width	Thickness
300mm (12")*	300mm (12")*	100mm to 350mm (4" to 14")*

*U.S. produced modules dimensionally rounded to the nearest inch.

Other densities, thicknesses, block sizes may be available on request subject to minimum order requirements.

RX2 = Side fixing system. Standard grade AISI 321

TL = Thread-Loc. Centre fixing system. Standard grade AISI 304

WL = Weld-Loc. Centre fixing system. Standard grade AISI 304 Other anchoring system options available subject to request.